
[illegible] [illegible]

SECURITY
MADE IN GERMANY
SINCE 1883

PYLOCX Compact [illegible] [illegible] [illegible] [illegible] Euro

[illegible]. [illegible]: PL62XX

[illegible] [illegible] [illegible] PYLOCX Compact [illegible] [illegible] Euro, [illegible] [illegible] [illegible] [illegible] 30 mm [illegible] / 30 mm [illegible] [illegible] 60 mm [illegible] / 60 mm [illegible] ([illegible] [illegible] [illegible] 5 mm). [illegible] [illegible] [illegible] [illegible] 7,2 mm. [illegible] [illegible] [illegible] [illegible] 60 mm [illegible] [illegible] [illegible].

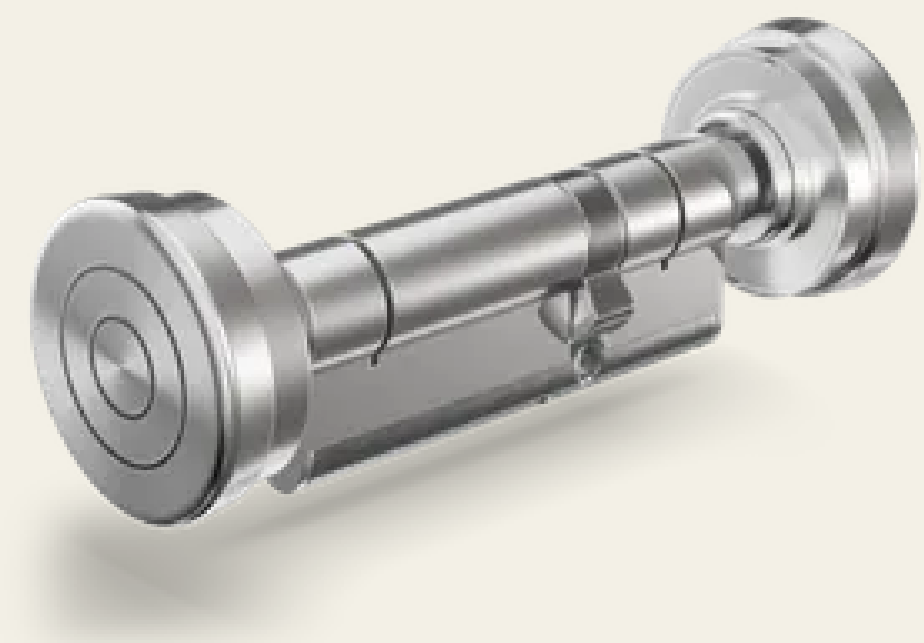

[illegible]

- 30 mm [illegible] / 30 mm [illegible] [illegible] 60 mm [illegible] / 60 mm [illegible]
- [illegible] [illegible] [illegible]
- [illegible] [illegible] [illegible] [illegible] Euro
- [illegible] [illegible] -40 °C [illegible] +60 °C
- [illegible] [illegible] [illegible]
- [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] PIN
- [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] 3000 [illegible]
- [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] IP68

[illegible] [illegible]

[illegible] [illegible] [illegible] [illegible], [illegible] PYKEY [illegible] [illegible] [illegible] [illegible] [illegible] [illegible]. [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible]. [illegible] [illegible] [illegible] [illegible] [illegible], [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible]. [illegible] [illegible] [illegible] [illegible], [illegible] [illegible] [illegible] [illegible] [illegible].

[illegible] [illegible]

- Der Doppelzylinder eignet sich für Türen mit Euro-Profilzylinder in technischen oder sicherheitsrelevanten Bereichen wie Infrastruktur-, Technik- oder Versorgungsanlagen. Dank Möglichkeit des Einmalcode-Zugang und Protokollfunktion eignet sich das System besonders für Anwendungen mit wechselnden Zutrittsberechtigungen oder erhöhten Sicherheitsanforderungen..

[illegible] [illegible]

SECURITY
MADE IN GERMANY
SINCE 1883

[illegible]

[illegible]	[illegible]
[illegible]	[illegible]
[illegible]	[illegible]
[illegible]	[illegible] Euro
[illegible]	IP68
[illegible]	[illegible] 7,2 mm [illegible]
[illegible]	-40 °C - +60 °C
[illegible]	[illegible]
[illegible]	PYKEY
[illegible]	[illegible]
[illegible]	[illegible]
[illegible]	[illegible] Euro-Profil
[illegible] [mm]	[illegible] (): 30-60 mm, [illegible] (): 30-60 mm