

LED signal light

Article No.: DKL 300

Flexible signaling over long distances in judicial facilities

Properties

- High-quality and robust design - pre-equipped for easy surface-mounted wall installation using AISI304 mounting plate



Functional description

The indicator and signal light for use as cell call communication, presence signaling, and lock status display for motorized locks. The three bright light surfaces are highly visible within a radius of 180°. Long-life, energy-saving LEDs with a 24 V DC operating voltage are used for this signal light.

Technical specifications


Material	zinc die casting
Surface	matte chrome-plated
Colour	Red, amber, green
Standards	Complies with DIN VDE 0.834/1
Temperature range	-40°C to +65°C
Weight [kg]	0,3
Cable length	4-pin Phoenix connector (included)
Operating voltage	24 V DC

Technical specifications

Dimensions LxWxH

145 x 75 x 25

SECURITY
MADE IN GERMANY
SINCE 1883

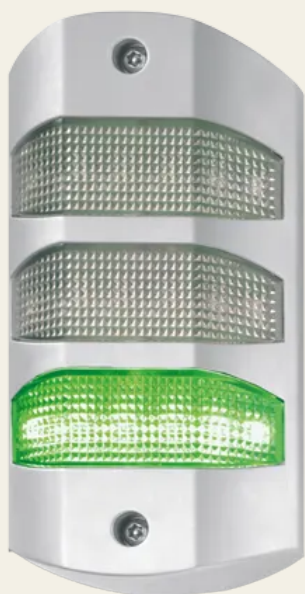

**SECURITY
MADE IN GERMANY
SINCE 1883**

