

### Flap hinge, flush, non-lift-off version, up to 120kg load capacity

Article No.: INOFLEX.PRO

---

#### Properties

- For flush doors
- Load capacity of up to 120 kg with two hinges
- Stainless steel investment casting, grinded and blasted
- 2D adjustability
- Available in rising or non-rising
- Can be used on the right or left
- Non-lift-off version (lift-off version – INOFLEX1)
- Covering caps and hinge pin with safety device
- Simple and fast assembly
- For indoor and outdoor use
- Opening angle max. 270°



#### Functional description

The INOFLEX2 stainless steel flap hinge combines modern design with the highest quality and practical functionality. With the rising and non rising versions, we have the optimum solution for individual requirements for flush doors up to 120 kg. The intuitive and simple assembly can be completed in no time at all.

#### Locations


- Cold room manufacturer
- Refrigerated vehicles
- Refrigerated hardware trade
- Metal/door construction

— Refrigerated door manufacturer

## Technical data

Load capacity [kg]	up to 120
Offset [mm]	0
Material	Stainless steel
Surface	Grinded and blasted
Door version	Right-hand version / left-hand version
Adjustability	2D
Opening angle	270°
Door type	Hinged door
Gradient	Yes / No
Load capacity	up to 120
Offset	0
Security	Yes

**SECURITY  
MADE IN GERMANY  
SINCE 1883**

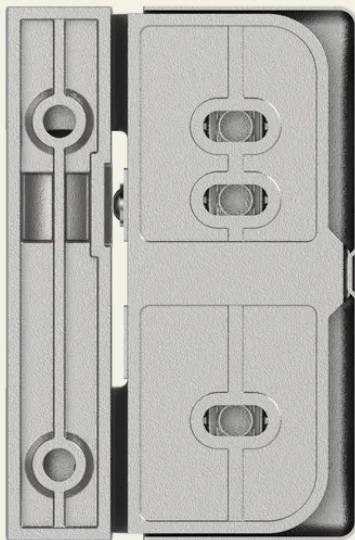

**SECURITY  
MADE IN GERMANY  
SINCE 1883**



**SECURITY**  
**MADE IN GERMANY**  
**SINCE 1883**

