


PYLOCX safe locks with intruder alarm system activation - VdS class 3, CEN IV

Article No.: PL2-MSV-G-VL

The safe lock set with EMA arming system from PYLOCX®
- VdS Class 3, CEN IV

Properties

- System with PYLOCX control module
- Opening by one-time code or fixed PIN
- Readable opening protocol up to 10,000 entries
- VdS-certified
- 2-lock system with connection to intruder alarm system
- Temperature range -20°C - 50°C

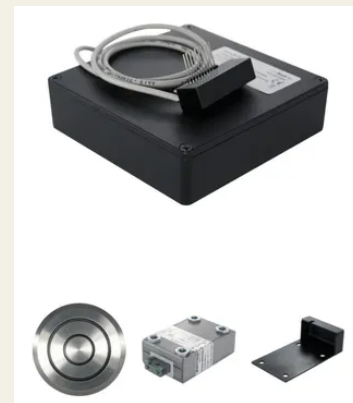

Functional description

Once an opening has been signalled by the PYKEY® and control module, the PL2044 motor lock opens or closes the motorised bolt. In de-energised mode, the PYKEY® supplies the energy for opening and keying.

Technical data

Standards	VdS 2.344:2.014-07 / VdS 2.369:2.022-09 / EN 1.300:2.013-11
-----------	---

IP-Rating	IP52
-----------	------

Temperature range	-25°C - +50°C
-------------------	---------------

Locking function	Electronic
------------------	------------

Locking set	PYKEY
-------------	-------

Technical data

Locking type Manual keyed, automatic keyed

Utilisation 2-lock system for secure storage units

Safety class VdS 3, CEN IV
