



PYLOCX control module 220V (external power supply required)

Article No.: PL2011

PYLOCX control module designed for 220V power supply.

Properties

- PYLOCX control module 220V
- Designed for live operation
- Opening via one-time code or fixed PIN
- Readable opening log with up to 10,000 entries
- VdS certified
- IP52
- Temperature range -20°C - 50°C



Functional description

After entering the code, the PYKEY is placed on the corresponding contact point on the device. The code is transmitted and the device opens. When energised, automatic keyed locking is possible via a door bolt contact.

Technical specifications


Material	Composite materials
Surface	Rough
Colour	Black
Standards	VdS 2.344:2.014-07, VdS 2.369:2.022-09, EN 1.300:2.013-11



Technical specifications

Fixing type	Screw-on
IP-Rating	IP52
Temperature range	-25°C to +50°C
Locking function	Electronic
Locking set	PYKEY
Lock type	Manual keyed, automatic locking
Use	Control of connected locks or other devices
Security class	VdS Class 2 EN 1.300 Class B
Operating voltage	220 V DC
Dimensions LxWxH	70 x 57 x 22.5 mm

SECURITY
MADE IN GERMANY
SINCE 1883

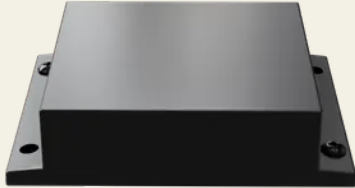

SECURITY
MADE IN GERMANY
SINCE 1883

