SECURITY
MADE IN GERMANY
SINCE 1883

PYLOCX key deposit - VdS - incl. lock insert - inner diameter 61.5 mm

Article No.: PL4011

The PL4011-SB tube safe can be installed in almost any wall using core drilling and offers space for keys, cash, credit cards or other valuables. Different cylinder lengths are available.



Properties

- PYLOCX key deposit in standard design
- Dimensions of lock insert: L 88.3 mm Ø 61 mm
- PYLOCX cylinder length 185 mm or 255 mm
- Flush-mounted assembly using core drilling
- Installation in free-standing columns and hollow walls possible
- Temperature range -35°C to + 60°C
- De-energised operation
- Opening with one-time code or fixed PIN
- Readable opening log with up to 10,000 entries
- VdS certified
- Suitable for indoor and outdoor use thanks to IP63
- Optional accessories: PL4019 key cup, PL4011SBÖ key eyelet, PL4011-LB light switch cover

Functional description

After entering the code, the PYKEY is placed on the contact point of the device. The code is transmitted and the device is supplied with power to open. The lock insert can be pulled out manually using the magnetic force of the PYKEY. When the lock insert is pushed back in, it locks automatically.

Technical specifications


SECURITY
MADE IN GERMANY
SINCE 1883

Technical specifications

Material	Aluminium
Surface	Hard anodised
Colour	Grey
Standards	VdS 2.105:2.013-10VdS 2.110:2.017-09VdS 2.344:2.014-07DIN 14.675 Annex C:2.003-11
IP-Rating	In metal cylinder: IP63 / Single: IP53
Temperature range	-35°C to +60°C
Locking function	Electronic
Locking set	PYKEY
Lock type	Automatic deadlocking
Use	Electronic tube safe
Security class	VdS class SD1 Environmental class IV
Dimensions LxWxH	L 88.3 mm Ø 61 mm
Weight [kg]	450g

SECURITY
MADE IN GERMANY
SINCE 1883



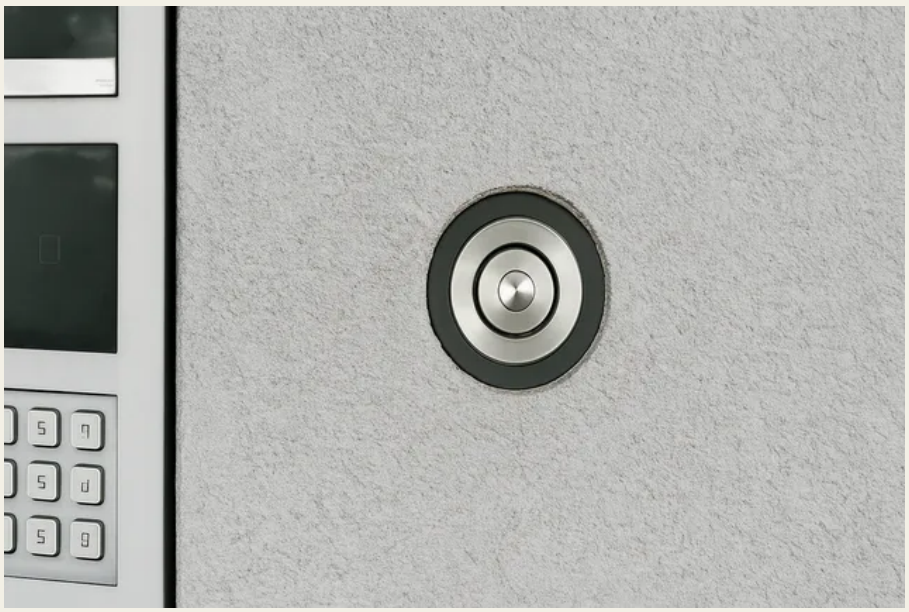

Steinbach & Vollmann GmbH | Parkstraße 11 42579 Heiligenhaus | +492056140 | info@stuv.de | www.stuv.de






PYKEY