SECURITY
MADE IN GERMANY
SINCE 1883

PYLOCX Retrofit lock insert for IKON key safe/key deposit box

Article No.: PL402X

The PL4012 key safe can be installed in almost any wall by core drilling and offers space for keys, cash, or credit cards, for example. The lock insert is compatible with IKON wall safe tubes.



Properties

- PYLOCX key safe in alternative version
- Dimensions of lock insert: L 77 mm Ø 64.3 mm
- Compatible with IKON wall safe tubes
- PYLOCX cylinder length 275 mm
- Flush mounting by core drilling
- Can be installed in free-standing columns and hollow walls
- Temperature range -35°C to + 60°C
- Powerless operation
- Opening with one-time code or fixed PIN
- Readable opening log with up to 10,000 entries
- VdS certified
- Suitable for indoor and outdoor use thanks to IP63
- Optional accessories: PL4021SBÖ key eyelet, PL4011-LB light switch cover

Functional description

After entering the code, the PYKEY is placed on the contact point of the device. The code is transmitted and the device is supplied with power to open. The lock insert can be pulled out manually using the magnetic force of the PYKEY. When the lock insert is pushed back in, it locks automatically.

Technical specifications


SECURITY
MADE IN GERMANY
SINCE 1883

Technical specifications

Material	Aluminium
Surface	Hard anodised
Colour	Grey
Standards	VdS 2.105:2.013-10 / VdS 2.110:2.017-09 / VdS 2.344:2.014-07 / DIN 14.675 Annex
IP-Rating	C:2.003-11 In metal cylinder: IP63 / Single: IP53
Temperature range	-35°C to +60°C
Locking function	Electronic
Locking set	PYKEY
Lock type	Automatic deadlocking
Use	Electronic tube safe
Security class	VdS Class SD1 Environmental Class IV
Dimensions LxWxH	L 77 mm Ø 64.3 mm
Weight [kg]	450g

SECURITY
MADE IN GERMANY
SINCE 1883



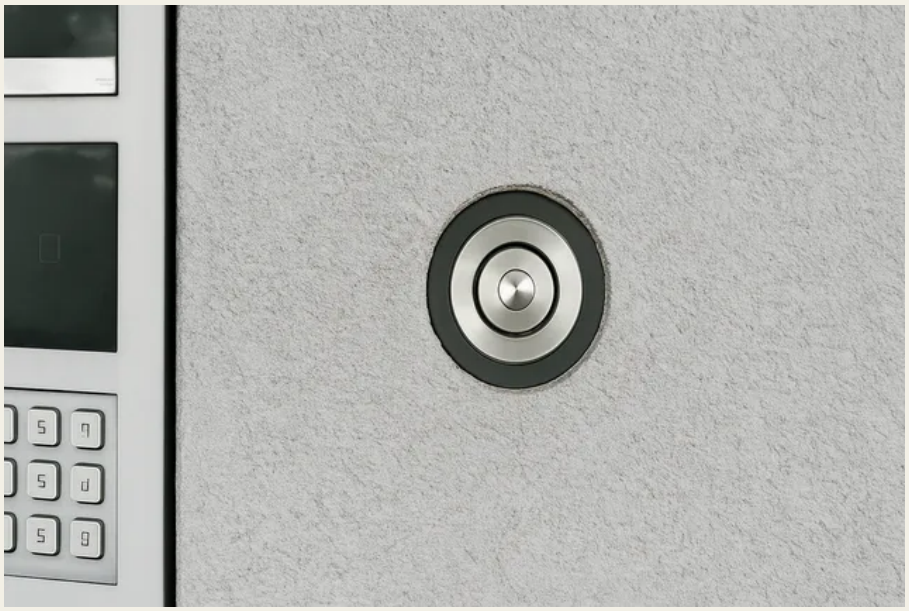





Steinbach & Vollmann GmbH | Parkstraße 11 42579 Heiligenhaus | +492056140 | info@stuv.de | www.stuv.de


PYKEY