


### PYLOCX lock insert for IKON key deposit - inner diameter 58 mm

Article No.: PL402X

---

The PL4021-SB tube safe can be installed in almost any wall using core drilling and offers space for keys, cash, credit cards or other valuables. The lock insert is compatible with IKON wall safe tubes.

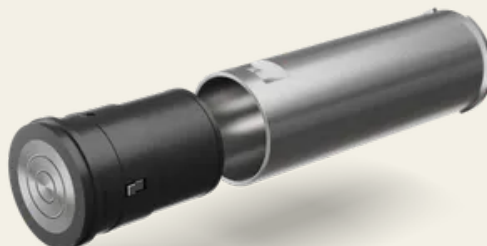

#### Properties

- PYLOCX key deposit in alternative version
- Dimensions of lock insert: L 77 mm Ø 64.3 mm
- Compatible with IKON wall safe tubes
- PYLOCX cylinder length 275 mm
- Flush-mounted assembly using core drilling
- Installation in free-standing columns and hollow walls possible
- Temperature range -35°C to + 60°C
- Powerless operation
- Opening with one-time code or fixed PIN
- Readable opening log with up to 10,000 entries
- VdS certified
- Suitable for indoor and outdoor use thanks to IP63
- Optional accessories: PL4021SBÖ key eyelet, PL4011-LB light switch cover

#### Functional description

After entering the code, the PYKEY is placed on the contact point of the device. The code is transmitted and the device is supplied with power to open. The lock insert can be pulled out manually using the magnetic force of the PYKEY. When the lock insert is pushed back in, it locks automatically.

#### Technical specifications

## Technical specifications

Material	Aluminium
Surface	Hard anodised
Colour	Grey
Standards	VdS 2.105:2.013-10 / VdS 2.110:2.017-09 / VdS 2.344:2.014-07 / DIN 14.675 Annex
IP-Rating	C:2.003-11 In metal cylinder: IP63 / Single: IP53
Temperature range	-35°C to +60°C
Locking function	Electronic
Locking set	PYKEY
Lock type	Automatic deadlocking
Weight [kg]	450g
Use	Electronic tube safe
Security class	VdS Class SD1 Environmental Class IV
Dimensions LxWxH	L 77 mm Ø 64.3 mm

**SECURITY  
MADE IN GERMANY  
SINCE 1883**



**SECURITY  
MADE IN GERMANY  
SINCE 1883**



**SECURITY  
MADE IN GERMANY  
SINCE 1883**

