


PYLOCX® locking mechanism for IKON key depot - inner diameter 58mm

Article No.: PL402X

The PL4021-SB tube safe can be inserted into almost any wall by drilling a core hole and offers space for keys, cash, credit cards or other valuables. The lock insert is compatible with IKON wall safe tubes.

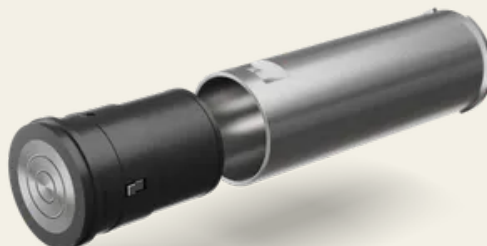

Properties

- PYLOCX key depot in alternative version
- Dimensions of locking insert: L 77mm Ø 64.3mm
- Compatible with IKON wall safe tubes
- PYLOCX cylinder length 275mm
- Flush-mounted assembly through core drilling
- Installation in free-standing columns and hollow walls possible
- Temperature range -35°C - + 60°C
- Power-free operation
- Opening by one-time code or fixed PIN
- Readable opening protocol up to 10,000 entries
- VdS-certified
- Suitable for indoor and outdoor use with IP63
- Optional accessories: PL4021SBÖ key eyelet, PL4011-LB light switch cover

Functional description

After entering the code, the PYKEY® is placed on the contact point of the device. The code is transmitted and the device is supplied with power for opening. The locking insert can be pulled out manually using the magnetic force of the PYKEY®. When the locking insert is pushed back in, it locks automatically.

Technical data

Technical data

Material	Aluminium
Surface	Hard anodised
Colour	Grey
Dimensions LxWxH	L 77mm Ø 64.3mm
Standards	VdS 2.105:2.013-10 / VdS 2.110:2.017-09 / VdS 2.344:2.014-07 / DIN 14.675 Annex C:2.003-11
IP-Rating	In metal cylinder: IP63 / Individually: IP53
Temperature range	-35°C - +60°C
Locking function	Electronic
Locking set	PYKEY
Locking type	Automatic deadlocking
Weight [kg]	450g
Utilisation	Electronic tube safe
Safety class	VdS class SD1 Environmental class IV
Dimensions [mm]	L 77 x Ø 64.3

**SECURITY
MADE IN GERMANY
SINCE 1883**

