Data sheet

SECURITY
MADE IN GERMANY
SINCE 1883

PYLOCX retrofit lock insert for KRUSE key safe/key deposit box

Article No.: PL404X

The PYLOCX retrofit lock cylinder is specially designed for the KRUSE key safe and enables existing locking systems to be retrofitted easily and securely without the need for structural modifications. This allows modern locking technology to be integrated into existing infrastructures with minimal effort.



Properties

- PYLOCX key safe in alternative version
- Dimensions of lock insert: Ø 35 - 67 mm (see variants)
- Compatible with KRUSE wall safes/tubes
- Non-electric operation
- Opening with one-time code or fixed PIN
- Readable opening log with up to 10,000 entries
- Suitable for indoor and outdoor use

Functional description

After entering the code, the PYKEY is placed on the contact point of the device. The code is transmitted and the device is supplied with power to open. The lock insert can be pulled out manually using the magnetic force of the PYKEY. When the lock insert is pushed back in, it locks automatically.


Technical specifications

Temperature range	-35°C to +60°C
Locking function	Electronic

SECURITY
MADE IN GERMANY
SINCE 1883

Technical specifications

Locking set	PYKEY
Lock type	Automatic deadlocking
Use	PYLOCX lock insert for IKON key deposit - inner diameter 35 mm
Dimensions LxWxH	Inner diameter 35 mm

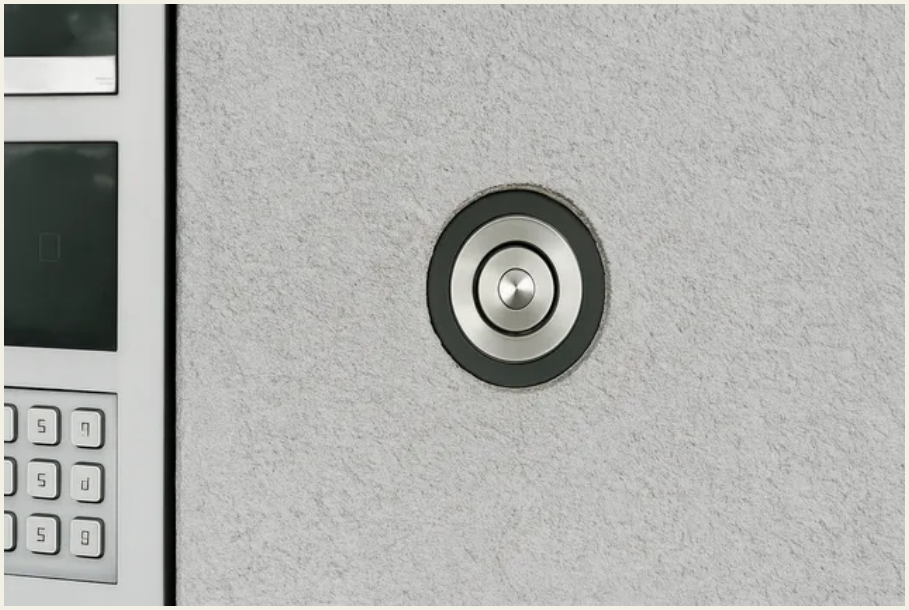





Steinbach & Vollmann GmbH | Parkstraße 11 42579 Heiligenhaus | +492056140 | info@stuv.de | www.stuv.de


PYKEY