Data sheet

SECURITY
MADE IN GERMANY
SINCE 1883

PYLOCX Comfort Euro profile knob cylinder

Article No.: PL60XX

The knob cylinders in the PL6021 Comfort series are available in sizes ranging from 25 mm internal / 30 mm external to 55 mm internal / 65 mm external (5 mm increments). All models are available with or without a return spring and can be installed in mortise locks with EURO profile cylinder plug-in units.



Properties

- 25 mm inside / 30 mm outside up to 55 mm inside / 65 mm outside
- Optionally with spring return
- Cylinder lock with Euro profile
- Temperature range -30°C to + 60°C
- Power-free operation
- Opening via one-time code or fixed PIN
- Readable opening log with up to 10,000 entries
- VdS certified
- Suitable for indoor and outdoor use thanks to IP65

Functional description

After entering the code, the PYKEY is placed on the contact point of the device. The code is transmitted and the device is supplied with power to open. After pulling out the knob, it can be turned to open. When closed, the outer knob turns freely.

Technical specifications


Material	Brass

SECURITY
MADE IN GERMANY
SINCE 1883

Technical specifications

Surface	Nickel-plated
Colour	Silver
Standards	VdS 2.344:2.014-07, VdS 2.156-2:2.013-06, VdS 2.386:2.012-07, DIN EN 15.684:2.013-02
Fixing type	For mortise locks with Euro profile cylinder plug-in unit
IP-Rating	IP65
Feature	With or without a recessed panel for doors with security hardware
Temperature range	-30°C to + 60°C
Locking function	Electronic
Locking set	PYKEY
Lock type	Manual keyed
Door type	Exterior doors, interior doors, and utility doors
Use	Euro profile cylinder
Security class	VdS KL. BZ***
Door thickness [mm]	Knob side (inside): 25–55 mm, contact point side (outside): 35–65 mm

SECURITY
MADE IN GERMANY
SINCE 1883

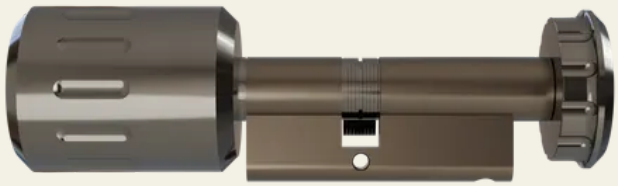



Steinbach & Vollmann GmbH | Parkstraße 11 42579 Heiligenhaus | +492056140 | info@stuv.de | www.stuv.de

SECURITY
MADE IN GERMANY
SINCE 1883



Steinbach & Vollmann GmbH | Parkstraße 11 42579 Heiligenhaus | +492056140 | info@stuv.de | www.stuv.de