


## Attachment lock, 2 profile cylinders with AP function

Article No.: TS550

The surface-mounted locks with double profile cylinder are designed for metal tubular frame or solid leaf doors. In addition to the latch, they lock upwards and downwards via espagnolette rods.

### Properties

- Latch bolt stroke 15mm
- Dead bolt rods vertical: 20mm stroke
- 9mm square nut

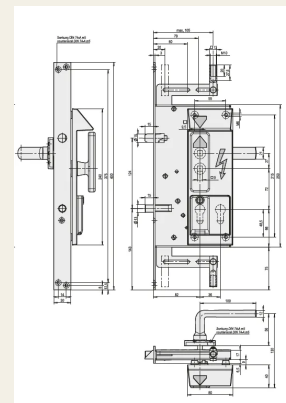

### Functional description

These slam-locks can be fitted with two profile cylinders, e.g. to realise different locking circuits. The locks can be opened from the inside at any time. This anti-panic function makes it possible to leave the room at any time. The locks are used in doors for transformer stations, for example.

### Technical data

Material	Steel
Surface	Zinc-plated
Colour	Silver
Dimensions LxWxH	175x137x29
Backset	33/105 mm
Distance	72 mm

## Technical data

Nut [mm]	9
Forend material	Steel zinc-plated
Material deadbolt	Stainless steel
Lock housing material	Steel zinc-plated
Dimensions [mm]	175 x 137 x 29
Backset [mm]	33/105
Distance [mm]	72

