SECURITY
MADE IN GERMANY
SINCE 1883

[redacted]

[redacted]: STG 200

[redacted]

- [redacted]
- [redacted]
- [redacted]
- [redacted]
- [redacted]
- [redacted]

[redacted]

- [redacted]
- [redacted]
- [redacted]
- [redacted]

[redacted]

[redacted]	[redacted]
[redacted]	[redacted]
[redacted]	-[redacted] -40°C [redacted] +80°C
[redacted]	[redacted]
[redacted]	[redacted]

[illegible] [illegible]

[illegible] [illegible] [illegible]	[illegible] [illegible] [illegible] [illegible]
[illegible] [illegible] [illegible]	[illegible] / [illegible]

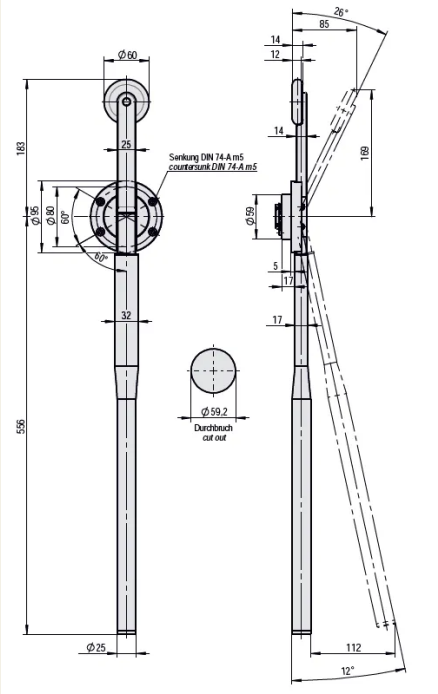
Ø60
25
Senkung DIN 74-A m5
countersunk DIN 74-A m5
Ø105
Ø80
Ø67
80°
32
183
556
Ø25
Ø59.2
Durchbruch
cut out
26°
85
14
12
14
189
Ø59
5
17
17
112
12°