SECURITY
MADE IN GERMANY
SINCE 1883

[illegible] [illegible] [illegible] [illegible]
[illegible] [illegible] - [illegible]

[illegible]: STG 200



[illegible]

- [illegible]
- [illegible]
- [illegible]
- [illegible]
- [illegible]
- [illegible]

[illegible]

- [illegible]
- [illegible]
- [illegible]
- [illegible]

[illegible]

[illegible]	[illegible]
[illegible]	[illegible]
[illegible]	-[illegible] -40°C [illegible] +80°C
[illegible]	[illegible]
[illegible]	[illegible]

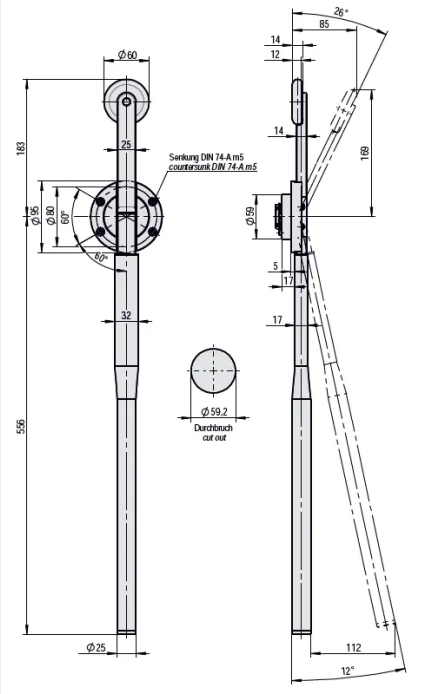
[illegible]

[illegible] [illegible] [illegible]

[illegible] [illegible] [illegible]

[illegible] [illegible]

[illegible] [illegible]


Ø60
25
Senkung DIN 74-A m5
countersunk DIN 74-A m5
Ø105
Ø80
Ø67
80°
32
183
556
Ø25
Ø59.2
Durchbruch
cut out
26°
85
14
12
14
189
Ø59
5
17
17
112
12°